

Panasonic
ideas for life

LQ-**MD800**
DVD Video Recorder

*A Professional DVD Video Recorder
for higher Video and Audio performance.*





Digital Video Recorder Using DVD-RAM/R Easy Operation and Fast Searching

This product complies to the medical electrical equipment standard with respect to electric shock, fire and mechanical hazards in accordance with IEC 60601-1, IEC60601-1-2 (EN 60601-1, EN 60601-1-2): (LQ-MD800P/LQ-MD800E)

This product is also classified by Underwriters Laboratories Inc. as to medical electrical equipment with respect to electric shock, fire and mechanical hazards only in accordance with UL 2602-1. Control number 76KA. (LQ-MD800P only)



High-quality images, High-quality audio recording

The Hybrid VBR MPEG2 encoder means High-quality images. Dolby Digital means High-quality audio. By recording in the XP or SP modes, you can record in Linear PCM (stereo) for even higher quality audio.

Maximum 8 hours recording

You can record a maximum of 8 hours on one double-sided 9.4 GB DVD-RAM disc. (4 hours maximum continuous recording)



Progressive output (NTSC only)

Connect to a Progressive signal compatible monitor for even higher quality images.

Remote control features

This unit comes standard with USB, RS-232C, PAUSE REMOTE for control. Remote control the unit from a PC.

NTSC/PAL switchable

Select the signal type (NTSC/PAL) to play or record either type.

Program search

Press the SEARCH button to bring up a list of programs. Then Select the program to start play.

Menu screens for simple operation

The menu screens offer easy-to-use icons for set-up and operation.

Program Editing [RAM]

You can divide and delete programs.

Create play list of just those scenes you need and play them in succession.

DVD-Video disc creation

By finalizing a DVD-R, you can create a disc that complies with DVD-Video standards and then play it on compatible DVD players.

Reliability

Industrial grade electronic parts

Key features

Direct recording into available space

You do not have to find a place to start as you do with tapes. There is also no fear of recording over previous recordings.

Send text data such as title

You can use the RS-232C/USB cables to send text information to use as program titles.

Auto-protect function

Recorded images can be protected automatically.

Repeat play, play list editing

Just decide a length of time to repeat, then specify the end point during play to play a section repeatedly. You can also edit together the images you need into a play list.

Play and edit on a PC

Use PC application to edit and create backup discs.


Small and light, power compatible between 100V and 240V

Compact so you have freedom in placement.

Discs for Superb Picture and Sound Quality,

Systems Applications

1. Image Filing System (RS-232C/USB-controlled)

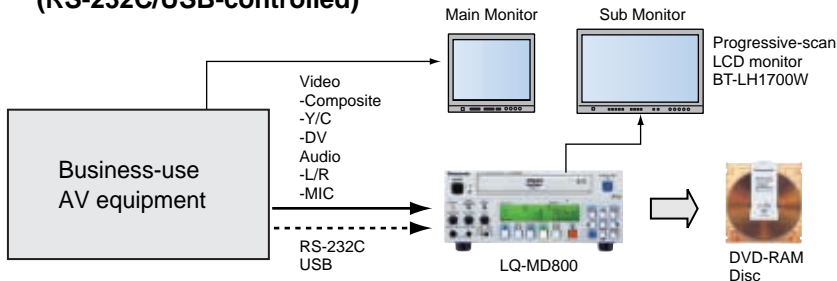

[1] Control of LQ-MD800 from business-use AV equipment

AV equipment with RS-232C control function can be used to control operations such as recording and playback, and playback modes like slow motion and fast forward.

[2] Direct recording onto free space on the disc, and prevention of accidental overwriting of previous data


Unlike videotape, the use of a disc eliminates the need to search for a blank space before you start recording. Also, you won't lose previously recorded data by accidentally recording over it.

[3] Recording of ID number and other information

A name and ID number can be recorded together with the title of the images via RS-232C/USB. A list can then be displayed for easy searching of recorded images.

[4] Audio input channels 1 and 2 for recording.

2. Image Filing System (Pause remote)

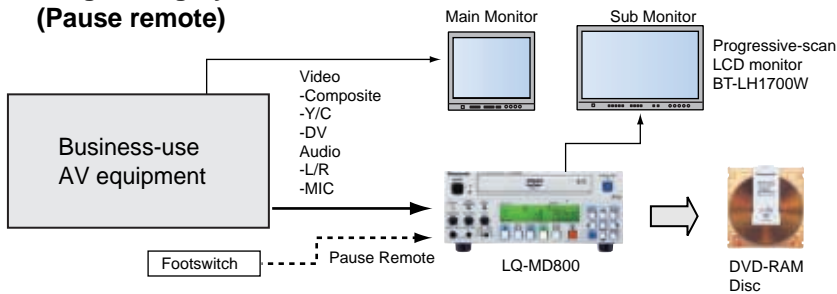

[1] Remote record pause

Recordings can be started and paused by using a footswitch or other device.


[2] Recording of ID number and other information

A name and ID number can be recorded together with the title of the images via RS-232C/USB. A list can then be displayed for easy searching of recorded images.

[3] Progressive-scan playback (NTSC only)

DVD ensures high-quality image playback.

3. Seminar Room/Viewing Station System

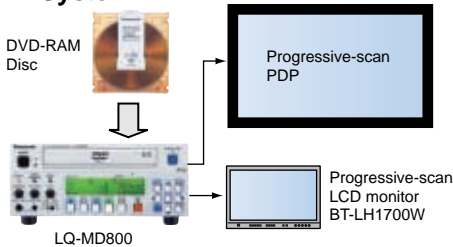

[1] Image search (List search based on recording date/time or ID)

Pressing the button displays a list of recorded images together with their recording date/time, thus allowing a quick and easy selection of the images to view. By registering a name for each image title, searching becomes even more convenient.

[2] Progressive-scan playback (NTSC only)

DVD ensures high-quality image playback.

[3] Playlist playback

A playlist can be produced for the programmed playback of selected images. Repeat loops are easily selected.

4. Editing Room System




[1] Playback and editing of images using a PC


Recorded images can be edited and a backup disc can be produced by using DVD editing/authoring software.

Using a PC for Control and DVD Editing

Controlling operation with a PC (Control software must be customized.)

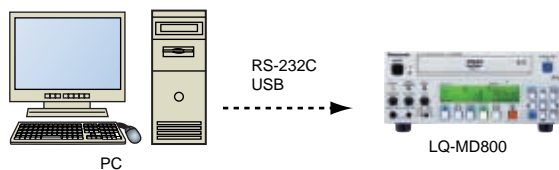

Using a PC for DVD editing

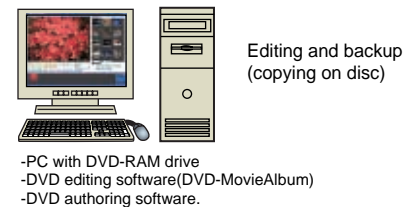

PC Control Example

In addition to basic VTR-like operation, the use of a disc allows the following convenient functions to be controlled from a PC.

Equipment Management	Acquisition of equipment status data: Operating mode, counter value, maintenance information
Disc management Operation	Data management: Disc title, program titles Space availability management: Confirmation of available recording space
Operation	Basic operations: Record, play, stop, special playback modes (frame-by-frame, slow, search) Search function: Direct search using counter value or program number GUI: Menu operation, etc.



DVD-RAM Disc



LM-AD240 9.4GB
Double Sided Removable

LM-AB120 4.7GB
Single Sided
Removable-cartridge

LM-AF120 4.7GB
Single Sided Non-cartridge

*In 9.4 GB double sided DVD-RAM, the capacity of record and playback is 4.7 GB for each side.

DVD-RAM disc features

High reliability

- Cartridge-type, easy handling
- Rewriting 100, 000 times
- DMS (Defect Management System) jumps over drops and scratches for recording (UDF2.0)

High capacity, removable

- Ideal for an image library
- Long term storage with no change
- Single-sided 4.7 GB/Double-sided 9.4 GB

SPECIFICATIONS

General

Power supply :	AC 100-240 V, 50/60 Hz
Current consumption :	0.51-0.28 A
Recording System :	DVD Video Recording Standards (DVD-RAM) DVD Video Standards (DVD-R)
Recordable discs :	DVD-RAM 12cm (4.7 GB/9.4 GB) DVD-R 12cm (4.7 GB) for General Ver.2.0 DVD-R 12cm (4.7 GB) for General Ver.2.0 4x-SPEED DVD-R Revision 1.0
Recording Time :	Maximum 4 hours (with 4.7 GB disc) XP: Approx. 1 hour, SP: Approx. 2 hours, LP: Approx. 4 hours
Playable discs :	DVD-RAM 12cm (4.7 GB/9.4 GB) DVD-R 12cm (4.7 GB) for General Ver.2.0 DVD-R 12cm (4.7 GB) for General Ver.2.0 4x-SPEED DVD-R Revision 1.0
Operating Temperature :	41 °F-104 °F (5 °C-40 °C)
Operating Humidity :	10 %-80 % RH (no condensation)
Dimensions :	8-7/16 (W) x 4-1/32 (H) x 14-3/8 (D) inch 214 (W) x 102 (H) x 365 (D) mm
Weight :	10.14 lbs (4.6 kg)

Video


Video System :	NTSC color signal, 525 Lines, 60 Fields PAL color signal, 625 Lines, 50 Fields
Recording system :	MPEG2 (Hybrid VBR)
Video In :	BNC x 1 1.0 Vp-p 75 , unbalanced S-Video In (4P) x 1 Y: 1.0 Vp-p 75 , unbalanced C: 0.286 Vp-p, burst level 75 , unbalanced (NTSC) C: 0.3 Vp-p, burst level 75 , unbalanced (PAL) DV-Input x 1 IEEE1394 Standard, 4pin (PAL/NTSC)
Video Out :	BNC x 2 1.0 Vp-p 75 , unbalanced S-Video In (4P) x 1 Y: 1.0 Vp-p 75 , unbalanced C: 0.286 Vp-p, burst level 75 , unbalanced (NTSC) C: 0.3 Vp-p, burst level 75 , unbalanced (PAL) Component video output (BNC) (NTSC 480P/480i) (PAL 576i) Y: 1.0 Vp-p 75 , unbalanced PB: 0.7 Vp-p 75 , unbalanced PR: 0.7 Vp-p 75 , unbalanced

Audio

Recording System :	Dolby Digital 2ch, Linear PCM 2ch (XP/SP mode)
Audio In :	PHONO x 2, Reference Level, -10 dBv, 47k unbalanced MIC In (mini jack) x 1 - 50 dBv, 3k unbalanced
Audio Out :	PHONO x 2, Reference Level, -10 dBv, 600 unbalanced MONITOR Out (PHONO) x 1 -10 dBv, 600 unbalanced Headphones Out (Stereo mini jack) x 1 Variable Level, Maximum, - 28 dBv, 8 unbalanced
Remote	USB (Type-B connector) USB Ver.1.1 (cable length: max. 3 m) RS-232C (D-sub 9 pin) PAUSE REMOTE (Stereo mini jack)

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

Dimensions

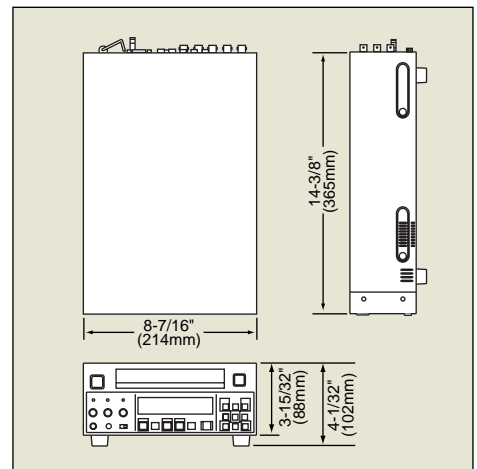

Panasonic

Matsushita Electric Industrial Co., Ltd.
Systems Business Group
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
Tel. 81-6-6905-4650 Fax. 81-6-6908-5969
<http://www.pavc.panasonic.co.jp/pro-av/>

Panasonic Digital Communications &
Security Company
Vision Systems Group
3 Panasonic Way
Secaucus, NJ 07094
877-733-3689
www.panasonic.com/vs

[Countries and Regions]

Argentina	+54 114 308 1610	Korea	+82 2 2106 6641
Australia	+61 2 9887 6222	Kuwait	+965 481 2123
Austria	+43 (0)1 610 80 773	Lebanon	+961 1 216827
Bahrain	+973 252292	Malaysia	+60 3 5549 5422 (PSE) +60 3 5546 7000 (PM)
Belgium	+32 (0)2 481 04 57	Mexico	+52 55 5488 1000
Bulgaria	+359 2 946 0786	Montenegro, Serbia	+41 (0)26 466 25 20
Brazil	+55 11 3889 4035	Netherlands	+31 73 64 02 577
Canada	+1 905 624 5010	New Zealand	+64 9 272 0100
China	+86 10 6515 8828	Norway	+47 67 91 78 00
(Hong Kong	+852 2313 0888)	Pakistan	+92 5370320 21
Czech Republic	+420 236 032 552/511	Panama	+507 229 2955
Denmark	+45 43 20 08 57	Peru	+51 1 614 0000
Egypt	+20 2 3938151	Philippines	+63 2 633 6162
Finland, Latvia, Lithuania, Estonia	+358 (9)521 52 53	Poland	+48 (22)338 1100
France	+33 (0)1 55 93 66 67	Portugal	+351 21 425 77 04
Germany	+49 (0)611 235 481	Puerto Rico	+1 787 750 4300
Greece	+30 210 96 92 300	Romania	+40 21 211 4855
Hungary	+36 (1)382 60 60	Russia & CIS	+7 095 258 42 06
Indonesia	+62 21 385 9449	Saudi Arabia	+966 1 465 0709
Iran	+98 21 2271463	Singapore	+65 6270 0110
Italy	+39 02 67 88 449	Slovak Republic	+421 (0)2 52 92 14 23
Jordan	+961 6 586 1914	Slovenia, Croatia, Bosnia, Macedonia	+44 (0)20 76 63 36 57
Kazakhstan	+7 3272 504 777		

South Africa	+27 11 313 1400
Spain	+34 (93) 425 93 00
Sweden	+46 (8) 680 26 41
Switzerland	+41 (0)41 259 96 32
Taiwan	+886 2 2725 9100
Thailand	+66 2 731 8888
Turkey	+90 216 578 3700
U.A.E.	+971 4 282201
Ukraine	+380 44 4903437 +380 44 4903438 [ext. 112]
U.K	+44 (0) 1344 70 69 20
U.S.A.	+1 201 348 5300



JQA-0443



SP-MD800PE2



8k506AM-2 Printed in Japan